Higher National Diploma in Engineering (Civil)

Third Year, Second Semester Examination - 2019

CE 3118-Management of Civil Engineering Construction

Q1)

i) Define the terms "Project and Project Management." (04 Marks)

ii) Write down four qualities that a project manager should possess. (04 Marks)

iii) Describe the importance of Construction Management. (04 Marks)

iv) Write down short notes on following records which are used in construction sites. (08 Marks)

a. Method Statement sheets

b. Log Note book

c. Variation Orders

d. Daily Progress report

e. Material Records

Q2)

i) What do you mean by "Management"? (02 Marks)

ii) Differentiate the terms Authority and Responsibility? (04 Marks)

iii) What do you mean by job analysis? List five methods of job analysis. (06 Marks)

iv) Explain the Human Resource Management process. (08 Marks)

Q3)

i) Define the term "Accounting". (03 Marks)

ii) What do you mean by "Break Even Point (BEP)". (03 Marks)

iii) The material X is used uniformly throughout the year. Following are the relevant information regarding this material.

- Annual demand 12000 units

- Ordering Cost Rs 600 per order
- Holding Cost Rs 10 per unit

Calculate the Economic Order Quantity (EOQ). (07 Marks)

iv) Differentiate the terms "Law of Demand" and "Law of Supply" in Economics. (07 Marks)

Q4)

Figure below illustrates the layout of building materials and access roads for the purposes of servicing two hoists for the erection of a low-rise building.

i)Comment and criticize the present layout in relation to the positioning of both the materials and hoists. (07 Marks)

ii) Draw the improved site layout with your suggestions. (05 Marks)

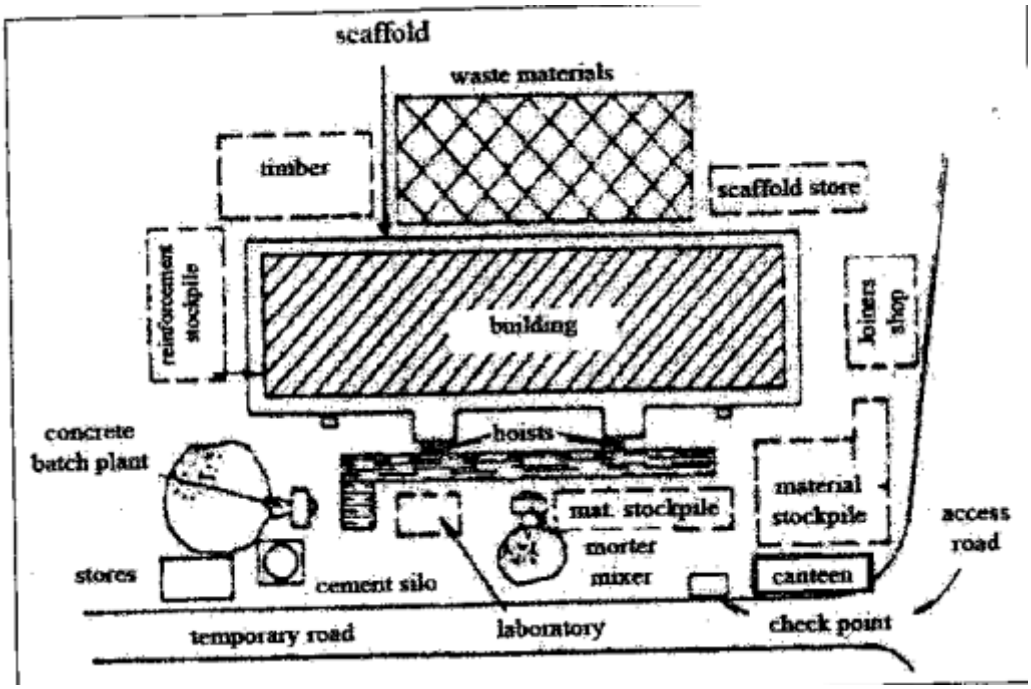

iii) What are the factors to be considered when storing material? State at least four. (04 Marks)

iv) State at least five duties and responsibilities of a store keeper. (04 Marks)

Q5)

i) Define the term "contract". (04 Marks)

ii) List out the types of contracts in Civil Engineering and briefly explain at least three contracts. (06 Marks)

iii) What are the essential factors to be considered to form a contract. (04 Marks)

iv) Describe about the accident prevention measures which could apply for a high-rise building construction site. (06 Marks)

Q6)

i) What do you mean by S-curve in planning of a project? (02 Marks)

ii) A project has been analyzed and the estimated times (in days) for the activities are shown below.

Activity	**Time (days)**
1-2	24
1-3	6
2-4	6
3-4	6
3-5	36
4-9	30
5-6	24

Activity	Time (days)
5-7	48
6-8	6
7-8	12
8-10	30
9-10	42

a) Draw the Network Diagram. (06 Marks)

b) Identify the critical path and project completion time. (04 Marks)

c) Calculate Early Finish time (EFT) and Late Finish time (LFT). (04 Marks)

d) Find out the Total Float for each activity. (04 Marks)